


Mod[®] Electrolytic

C-ET250-25-MOD

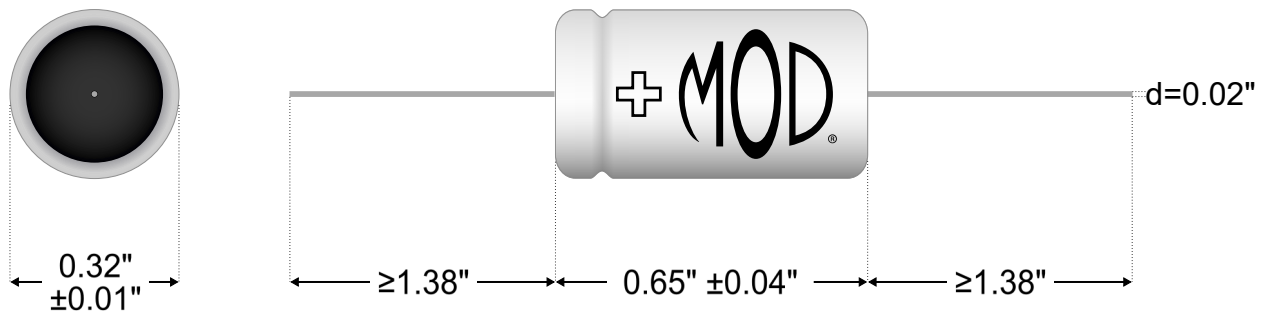

*drawing not to scale

Type	Axial Leaded Electrolytic
Capacitance	250 μ F
Rated Voltage (DC)	25 V
Tolerance	\pm 20%
Load Life	2000 hr at 105°C w/ 100% rated voltage
Surge Voltage (DC)	32 V
Operating Temperature	-25°C to +105°C
Leakage Current (after 2 min.)	\leq 62.5 μ A
Max. Dissipation Factor (120Hz)	10%
Max. Ripple Current (120Hz)	0.28 A at 105°C

