


Mod[®] Electrolytic

C-ET50-100-MOD

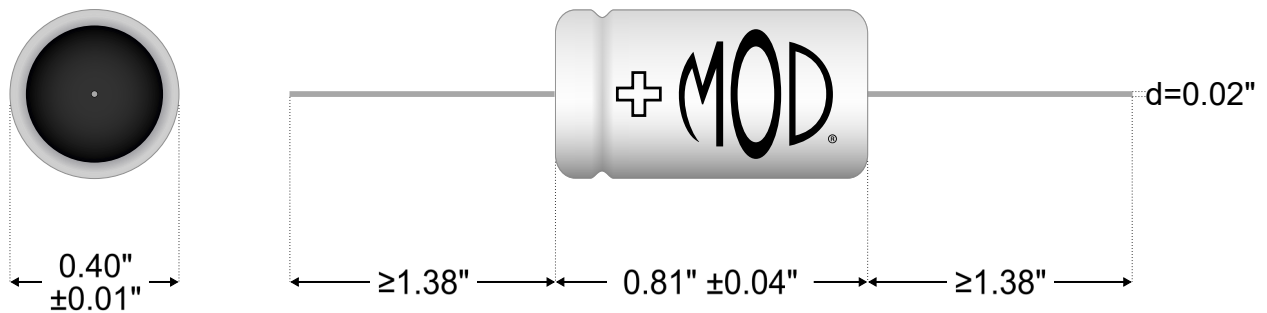

*drawing not to scale

| | |
|---------------------------------|--|
| Type | Axial Leaded Electrolytic |
| Capacitance | 50 μ F |
| Rated Voltage (DC) | 100 V |
| Tolerance | \pm 20% |
| Load Life | 2000 hr at 105°C w/ 100% rated voltage |
| Surge Voltage (DC) | 125 V |
| Operating Temperature | -25°C to +105°C |
| Leakage Current (after 2 min.) | \leq 50 μ A |
| Max. Dissipation Factor (120Hz) | 10% |
| Max. Ripple Current (120Hz) | 0.16 A at 105°C |

